



# Product Guide

*Industrial Data Communications*



# Westermo Worldwide...

**Produced by:**  
Westermo Teleindustri AB

**Photo:**  
IStockphoto,  
BildN, Västerås, Sweden

**Illustrations:**  
Visual Information Sweden AB  
Eskilstuna, Sweden

*Specifications are subject to  
change without notice due to  
continuous product develop-  
ment and improvement.*

Westermo was established in the early 1970s. The head office is located 150 km (93.2 miles) southwest of Stockholm in Sweden. Over the past three decades Westermo has grown with subsidiaries being established in Sweden, UK, Germany, France, Singapore and sales partners appointed in over 30 Countries worldwide.

Today the Westermo brand name is synonymous with Robust Industrial Data Communications.

Our 35 years of experience in the industrial marketplace goes far beyond our own products. We understand the problems that can occur in applications installed in the toughest industrial environments and therefore we can offer you the most effective and economical solutions.

All our products are specifically designed to operate reliably in harsh industrial environments and in applications requiring the highest levels of reliability and availability.

*Let Westermo be your first choice for robust industrial data communication solutions.*

## A product range to meet every requirement

Westermo provides a full range of data communication solutions for demanding applications such as railways, aviation, defence, water treatment, substation automation, roads and tunnels. The staff at Westermo can provide the highest levels of service and technical support to help our customers choose, configure and install the best solution for each specific application requirement. Our knowledge goes far beyond our own product range; we have a unique competence regarding your environment whether it is on a train, in an aeroplane, on the seabed or in a substation. To ensure a close relationship with the customer, Westermo has a local presence in more than 35 countries. A selection of our most popular products are represented in this catalogue, but the Westermo product line includes more than a thousand different types and versions of our modems, switches, routers and converters.

### Quality

Westermo strives for the highest quality. To this end, we will endeavour to supply products, goods and services in a courteous fashion that reflects our commitment to the Quality Policy as summarized below, therefore, we will;

- Understand our customer's requirements and needs as well as relevant regulations, so as to develop, manufacture and offer the right products.
- Give our customers excellent support throughout the entire business process.
- Keep up our never ending commitment for even better quality and effectiveness.

This gives and will continue to give us stability, long term growth and profitability.

### Technical support

Westermo has always believed in providing the best technical service possible to help you, our customer, get your systems operational. All our subsidiaries employ significant technical support departments that allow us to give free of charge telephone technical support in a number of languages during normal office hours. We also commit many hours to working with other product vendors to produce product application notes that can be downloaded from the web at anytime.

*For more information about product and services from Westermo, please visit our website at [www.westermosales.com](http://www.westermosales.com).*



## Contents

<i>Ethernet Routing Switches</i>	<i>3 – 4</i>
<i>Ethernet Switches</i>	<i>5 – 7</i>
<i>Ethernet Extenders</i>	<i>8 – 9</i>
<i>Remote Access</i>	<i>10 – 13</i>
<i>Fibre Optics</i>	<i>14 – 15</i>
<i>Serial Converters</i>	<i>16 – 18</i>
<i>Housings</i>	<i>19</i>
<i>Accessories</i>	<i>19 – 21</i>
<i>Approvals</i>	<i>21</i>



# Industrial Routing Switches

*Industrial networks have particular requirements that make them differ from normal IT networks where high reliability, real-time switching functions and environmental specifications are required. The RedFox has been developed with unique switching functionality like FRNT redundancy protocol, IGMP snooping, VLANs as well as layer 3 routing to meet the latest market requirements.*

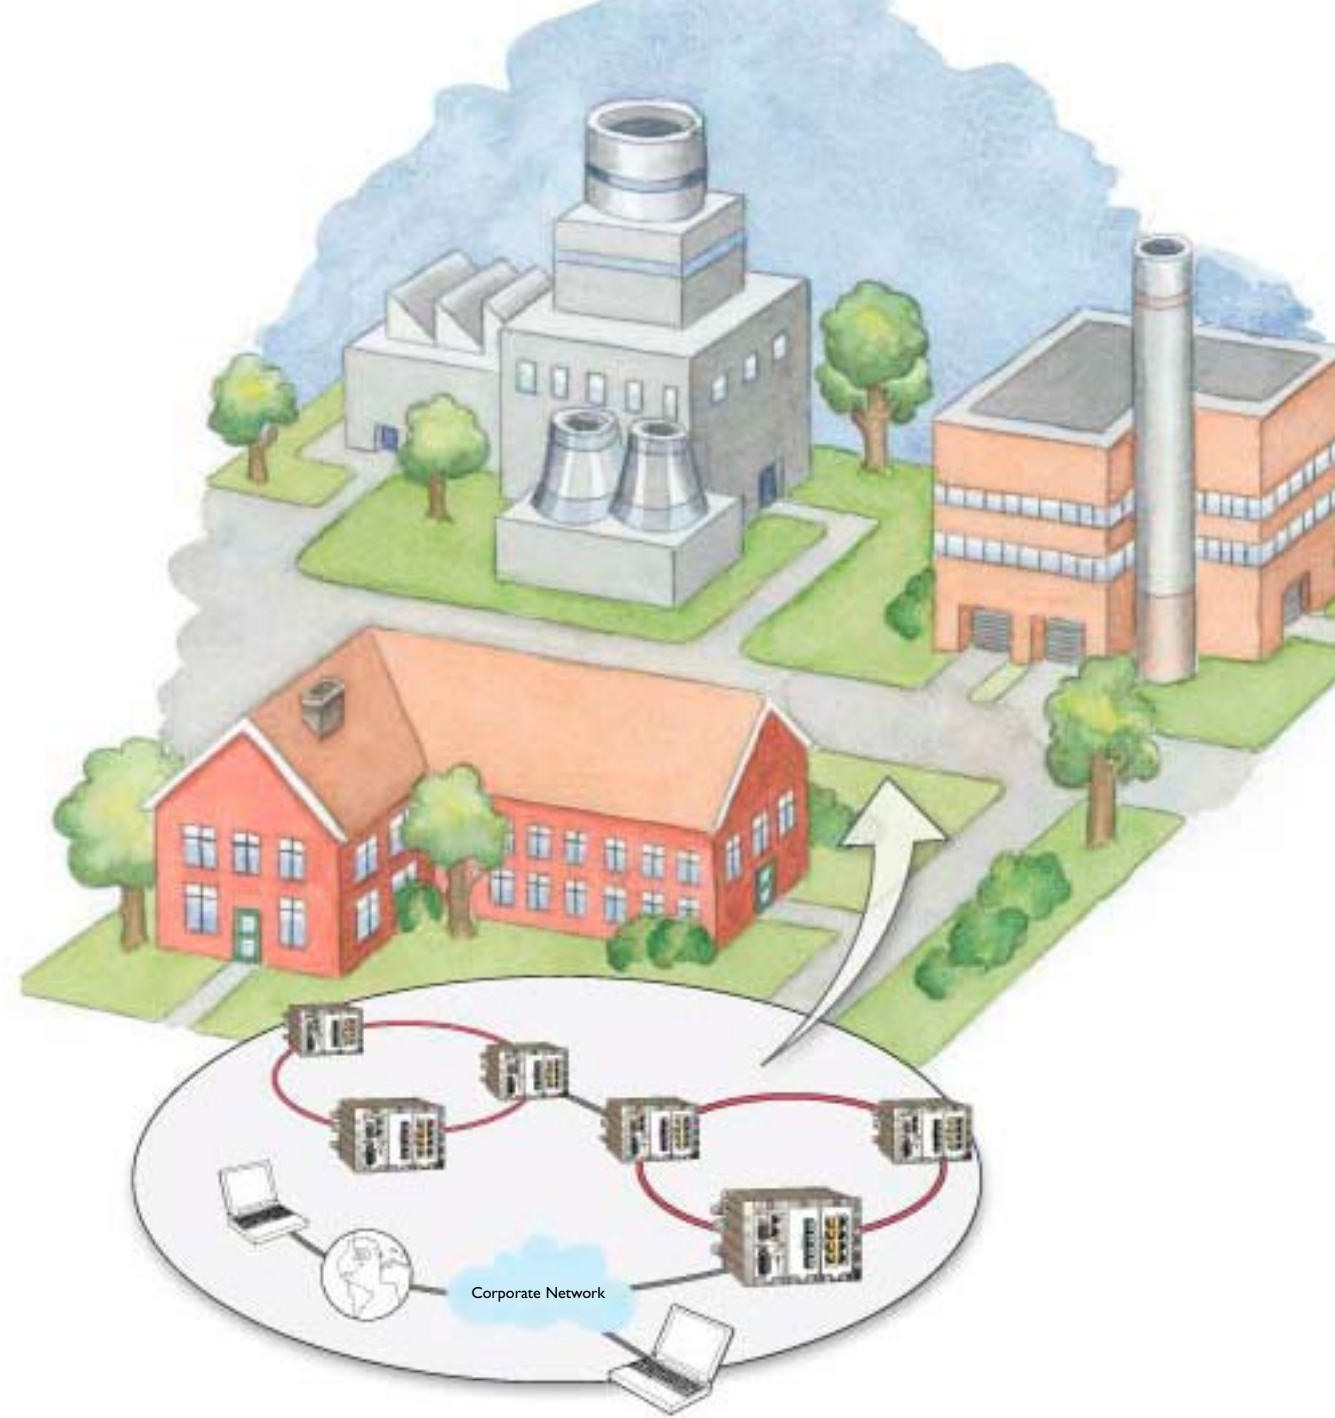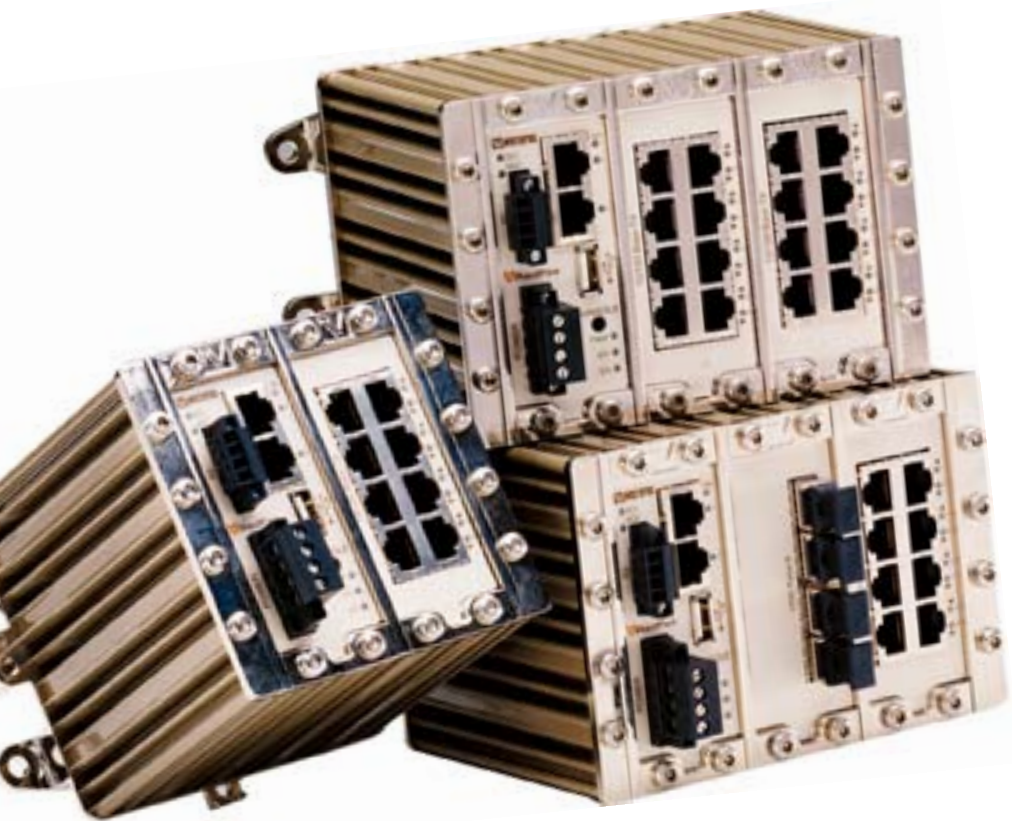

*Ethernet is rapidly becoming the most common communication standard deployed in industrial applications and it has become clear that the next generation of industrial switches must support Layer 3 and routing functionality. The RedFox routing switch provides static routing, firewall functions and has the ability to act as a VPN client/server. It can be configured with up to eight gigabit ports and meets the most demanding industrial environmental specifications.*

# RedFox Industrial Routing Switch







The RedFox is a high performance industrial Ethernet switch with enhanced routing functionality, in a single robust unit. A single RedFox allows you to build cost effective, secure and reliable networks that would previously have required several different units. The feature-rich firmware and highly specified hardware provide flexibility and enhanced performance when building complex networks.

For mission critical applications our unique FRNT technology is the fastest protocol on the market for re-configuring large networks in the event of link or hardware failure. Gigabit support on ring as well as access ports along with bandwidth control techniques like VLANs and IGMP snooping allow RedFox to be optimised to perform with even the most bandwidth hungry applications such as video.

Advanced routing functions and firewall settings allow the RedFox to segregate networks and ensure that mission critical industrial networks are protected. The RedFox is also able to provide secure remote access to these networks across insecure connections by acting as a VPN client/server.

- ⌘ *Static routing, Firewall, NAT*
- ⌘ *Up to 8 x Gbit and 10 x Fast Ethernet ports*
- ⌘ *Flexible transceiver configuration (multi, single, bi-di) up to 120 km*
- ⌘ *<20 ms FRNT ring redundancy on large networks*
- ⌘ *VPN, SNMP, VLAN, QoS, IGMP Snooping, HoL, STP/RSTP*
- ⌘ *Made easy configuration and comprehensive diagnostic*
- ⌘ *Extended temperature range (-40°C to +70°C)*
- ⌘ *16 to 60 VDC isolated redundant power inputs*
- ⌘ *IP 40 robust metal housing*

Product/Art. no	Description	Connectivity
<b>RFI-10</b> 3641-3110 	High performance industrial Ethernet switch with enhanced routing functionality. 10 x 10/100BaseT ports. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10 x 10/100BaseT Digital I/O Console USB
<b>RFI-18</b> 3641-3100 	High performance industrial Ethernet switch with enhanced routing functionality. 18 x 10/100BaseT ports. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	18 x 10/100BaseT Digital I/O Console USB
<b>RFI-14-F4G</b> 3641-3200 	High performance industrial Ethernet switch with enhanced routing functionality. 10 x 10/100BaseT ports and 4 SFP slots with Gbit support. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10 x 10/100BaseT 4 x Gbit SFP slots Digital I/O Console USB
<b>RFI-18-F4G-T4G</b> 3641-3300 	High performance industrial Ethernet switch with enhanced routing functionality. 10 x 10/100BaseT, 4 x 1000BaseT ports and 4 SFP slots with Gbit support. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10 x 10/100BaseT 4 x 1000BaseT 4 x Gbit SFP slots Digital I/O Console USB

\* For transceiver selection, see page 38

# Standards and functionality

WeOS (Westermo Operating System) delivers an extensive set of functionality including layer-2 (basic switching, VLAN, IGMP snooping, etc.), layer-3 (routing, firewall, NAT, etc.), and higher level services (DHCP, DNS, etc.). Furthermore, WeOS provides easy management via a Web interface, via the Westermo IPConfig tool, and even via a USB stick. To satisfy more advanced customer needs, WeOS provides flexible management via a command line interface (CLI), as well as via SNMP.

<b>Ethernet technologies</b>	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT and 100BaseFX IEEE 802.3ab for 1000BaseT IEEE 802.3z for 1000BaseX
<b>Resiliency and high availability</b>	Fast Reconfiguration of Network Topology (FRNT) FRNT Link Health Protocol (FLHP) IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid STP (RSTP)
<b>Layer-2 Switching</b>	IEEE 802.1Q Static VLAN and VLAN Tagging IEEE 802.3x Flow Control IGMPv2/v3 snooping
<b>Layer-2 QoS</b>	IEEE 802.1p Class of Service Flexible classification (VLAN tag, VLAN ID, IP DSCP/ToS, Port ID)
<b>IP Routing and Firewall</b>	Static IP routing Firewall, NAT, Port Forwarding
<b>Manageability</b>	<b>Management interfaces</b> <ul style="list-style-type: none"> <li>• Web interface</li> <li>• Command Line Interface (CLI) via console port and SSHv2</li> <li>• Westermo IPConfig tool</li> </ul> <b>Syslog</b> <b>SNMPv1/v2c</b> <b>SNMP MIB support</b> <ul style="list-style-type: none"> <li>• RFC1213 MIB-2</li> <li>• RFC2863 Interface MIB (ifXTable)</li> <li>• RFC2819 RMON MIB (etherStatsTable)</li> <li>• RFC4188 Bridge MIB</li> <li>• RFC4318 RSTP MIB</li> <li>• RFC4363 Q-BRIDGE MIB (dot1qVlan and dot1qVlanStaticTable)</li> <li>• RFC4836 MAU MIB (dot3ifMauBasicGroup and dot3ifMauAutoNegGroup)</li> <li>• RFC4133 Entity MIB (entityPhysical)</li> <li>• WESTERMO PRIVATE MIB</li> </ul> <b>SNTP client</b> <b>DHCP client</b> <b>DHCP server</b> <b>Digital I/O</b> <b>Port Monitoring</b> <b>IEEE 802.1ab Link Layer Discovery (LLDP)</b>

# Ethernet Switches

*Ethernet in industrial environments must be very reliable as downtime is much less tolerable in the factory than the office. Harsh environments with electrical noise and vibrations require equipment of very highest quality. Westermo offers a wide product range, from unmanaged switches up to the fastest redundant ring switch on the market. Our unique FRNT technology allows for up to 200 switches in the network and a recovery time of less than 20 ms.*



*Many roadside applications have begun to use Ethernet networks to provide connectivity for roadside equipment such as emergency phones, traffic surveillance cameras and traffic signals. Reliable data communications are vital when building safety critical applications, this makes our products the ideal choice for these often harsh environments.*

## One Switch, many solutions

The Lynx is a family of switches consisting of six models with different function levels, giving you the ability to select the perfect switch for your application providing optimum functionality at the best value.

The Lynx family can be configured with either 100 Mbit or Gigabit transceivers, the transceivers are then available for ranges up to 120 km.

Our unique FRNT (Fast Recovery of Network Topology) technology is the fastest protocol on the market to re-configure a large network in the event of any failure of a link or hardware. That is why the Lynx-series is used in safety critical applications such as tunnels, traffic signal control and railway systems.

Real-time properties are implemented in order to achieve determinism for real time critical applications. The switches support QoS (Quality of Service) with four priority queues and strict priority scheduling as well as HoL (Head of Line Blocking Prevention). All to ensure that the data network is deterministic.



- ⌘ 10 / 100 / 1000 Mbit/s
- ⌘ Flexible transceiver configuration (multi, single, bi-di) up to 120 km
- ⌘ <20 ms FRNT ring redundancy on large networks
- ⌘ VPN, SNMP, VLAN, QoS, IGMP Snooping, HoL, STP/RSTP
- ⌘ Made easy configuration and comprehensive diagnostic
- ⌘ Approved for harsh environments (DNV, Class 1, Div 2)
- ⌘ Extended temperature range (-40°C to +70°C)
- ⌘ 19 to 60 VDC redundant power input
- ⌘ IP 40 robust metal housing



Class I, Div 2

Product/Art. no	Description	Connectivity
<b>Lynx 100</b> 3640-xxxx 	Industrial Ethernet switch. Lynx 1100 supports 1 Gbit transceivers.	2 x SFP slots (Lynx 1100 Gbit support)
<b>Lynx 1100</b> 3640-xxxx 	Industrial Ethernet switch with support for redundant rings. Lynx 1300 supports 1 Gbit transceivers.	6 x 10/100BaseT Alarm relay
<b>Lynx 300</b> 3640-xxxx 	Industrial Ethernet switch with support for redundant rings, VLAN and IGMP snooping. Lynx 1400 supports 1 Gbit transceivers.	2 x SFP slots (Lynx 1400 Gbit support)
<b>Lynx 1300</b> 3640-xxxx 	Industrial Ethernet switch with support for redundant rings, VLAN and IGMP snooping. Lynx 1400 supports 1 Gbit transceivers.	6 x 10/100BaseT Alarm relay
<b>Lynx 400</b> 3640-xxxx 	Industrial Ethernet switch with support for redundant rings, VLAN and IGMP snooping. Lynx 1400 supports 1 Gbit transceivers.	2 x SFP slots (Lynx 1400 Gbit support)
<b>Lynx 1400</b> 3640-xxxx 	Industrial Ethernet switch with support for redundant rings, VLAN and IGMP snooping. Lynx 1400 supports 1 Gbit transceivers.	6 x 10/100BaseT Alarm relay




## Ultra Slim M12 Switch

The Viper series is a family of three 8 port switches with real-time properties for critical applications. The IP65 sealed metal case and rugged M12 front connectors makes it robust and allows for the surrounding air temperature to be between -40 to +70°C. There are no sensitive or fragile components, hardening the product against shock and vibration making these units suitable for rolling stock usage.

The power supply operates over a wide input range from 24 to 110 VDC.



- ⌘ 10/100BaseT rugged M12 connectors
- ⌘ <20 ms FRNT ring redundancy on large networks
- ⌘ SNMP, VLAN, QoS, IGMP Snooping, HoL, STP/RSTP
- ⌘ Made easy configuration and comprehensive diagnostic
- ⌘ EN 50155 approved for rolling stock
- ⌘ Extended temperature range (-40°C to +70°C)
- ⌘ 24 to 110 VDC power input
- ⌘ MTBF >800 000 hours
- ⌘ IP 65 robust ultra slim metal housing


Product/Art. no	Description	Connectivity
<b>Viper 008</b> 3641-0340 	Extremely robust 8-port unmanaged Ethernet switch	8 x 10/100 Mbit/s M12 Ethernet connectors
<b>Viper 108</b> 3641-0350 	Extremely robust 8-port Ethernet switch with limited manageability.	8 x 10/100 Mbit/s M12 Ethernet connectors.
<b>Viper 408</b> 3641-0360 	Extremely robust managed 8-port Ethernet switch with support for redundant rings.	8 x 10/100 Mbit/s M12 Ethernet connectors.

## Unmanaged Ethernet Switch

The SDW is a 5 port switch which can be configured with one or two fibre optic transceivers for either multi- or singlemode cables. The switch is a plug and play unit but also offers the possibility that each port can be configured via DIP-switches. The screen of each TX port is individually isolated to help prevent earth loop problems within the network.

- ⌘ 10/100BaseT plug-and-play Ethernet switch
- ⌘ Flexible transceiver configuration (multi, single, bi-di) up to 120 km
- ⌘ Auto negotiation or manual DIP-switch port configuration
- ⌘ Transparent to large frames (VLAN/QoS)
- ⌘ Extended temperature range (-25 to +70°C)
- ⌘ 10 to 60 VDC redundant power input
- ⌘ Galvanic isolation and transient protection




Product/Art. no	Description	Connectivity
<b>SDW-500 series</b> 3644-xxxx 	The SDW-500 series is a range of unmanaged industrial Ethernet switches with a flexible combination of TX- and FX- 10/100 Mbit/s ports.	3 x 10/100Base T 2 x Optional ports (2 x 10/100Base T, 2 x 100Base FX or one of each)

# Ethernet Media Converter

The MCW-211 convert data between Ethernet 10/100BaseT and 100BaseFX. The unit is easy to use and install caused by auto-negotiation of speed and duplex, autocrossover and auto-polarity. The media converter is transparent for large frames (VLAN or QoS). It is also possible to set speed, duplex and flow control via DIP-switches. The FX side supports Far-End-Fault indication. A link fault from either side is forwarded to the other side, Link Fault Forwarding.

- ⌘ 10/100BaseT to 10/100BaseFX conversion
- ⌘ Auto negotiation or manual DIP-switch port configuration
- ⌘ Transparent to large frames (VLAN/QoS)
- ⌘ Extended temperature range (-25 to +70°C)
- ⌘ 10 to 60 VDC redundant power input
- ⌘ Galvanic isolation and transient protection



Product/Art. no	Description	Connectivity
<b>MCW-211</b> 3645-xxxx 	Industrial Ethernet FX to TX media converter.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100BaseT 100BaseFX

# Serial Converters

The EDWs allow devices with only a serial port to communicate over an Ethernet network. They can be used either in point-to-point or point-to-multipoint applications.

The EDW-100/120 are supplied with a software utility allowing 2 virtual COM ports to be created on a PC. This software will redirect data, originally sent to a local COM port, to the remote serial interface of the EDW-100/120 meaning no changes are required to legacy applications. This makes it possible for "old" serial devices to communicate on a standard Ethernet network thus removing the need to maintain two different networks.

- ⌘ 10/100BaseT to RS-232 / RS-422/485 serial conversion
- ⌘ Termination of RS-422/485 and fail safe functionality
- ⌘ Made easy configuration and comprehensive diagnostic
- ⌘ Extended temperature range (-25 to +70°C)
- ⌘ 10 to 60 VDC redundant power input
- ⌘ Galvanic isolation and transient protection

Product/Art. no	Description	Connectivity
<b>EDW-100</b> 3616-0020 	Serial to Ethernet converter with RS-232 and RS-422/485 ports.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100BaseT Serial (RS-232) Serial (RS-422/485)
<b>EDW-120</b> 3616-0010 	Serial to Ethernet converter with dual RS-232 ports.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100BaseT 2 x Serial (RS-232)


## Customer Success Story

# Highway tunnel emergency system

The A14 highway links the Paris business district of La Défense with Orgeval. The highway is mainly underground and the total tunnel length is more than 13 km. Technical supplier SDEL was selected to provide the tunnels with an emergency system. There are eight tunnels in total, and at each tunnel entrance SDEL designed a message sign and road barrier system to stop the traffic in case of an emergency. A central redundant fibre network built with Lynx switches provides a backbone for a number of DDW-221 SHDSL sub-networks that control the message signs. The backbone network and the sub-networks all use the Westermo FRNT redundancy protocol. This design delivers a redundant system that provides high availability, reliability, and safety which were the major factors in the customers decision to use the Westermo Lynx and DDW-221.




- Lynx central redundant fibre network
- DDW-221 SHDSL sub-networks
- FRNT redundancy protocol

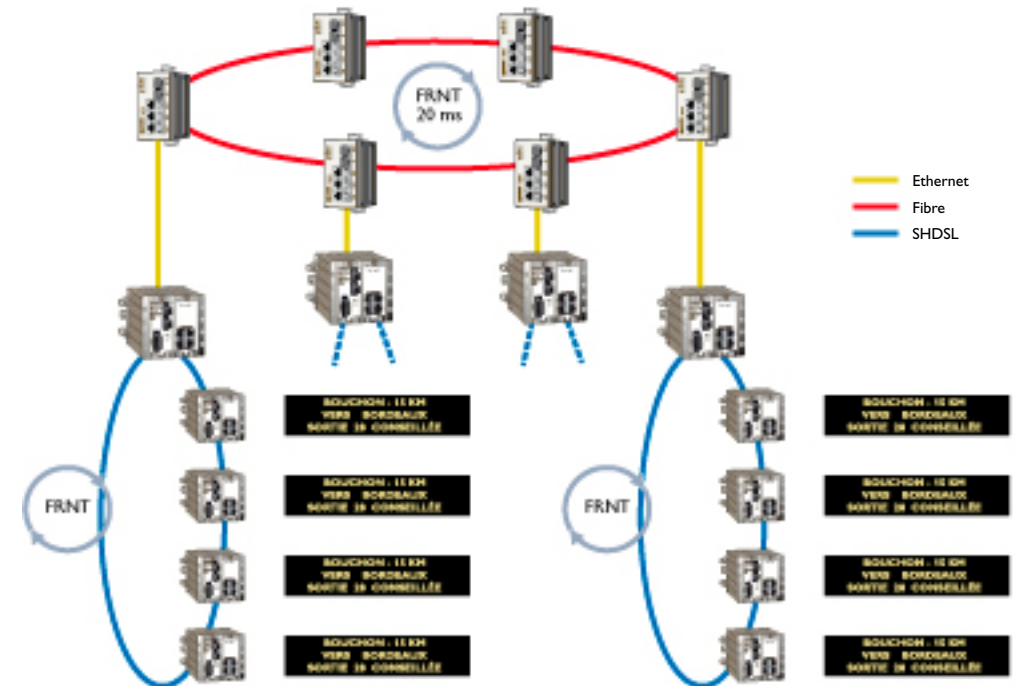

# Ethernet Extenders

*Ethernet Extenders allow you to ignore the conventional Ethernet boundaries for copper cable. By design, a standard Ethernet network has a transmission limit of 100 metres (328 ft) over UTP copper cables, our ethernet extender series – the Wolverine, allows you to go much further and on many other kinds of cable. The Wolverine series utilises SHDSL technology on twisted pair cables to establish a high-speed remote connection between two Ethernet Networks.*

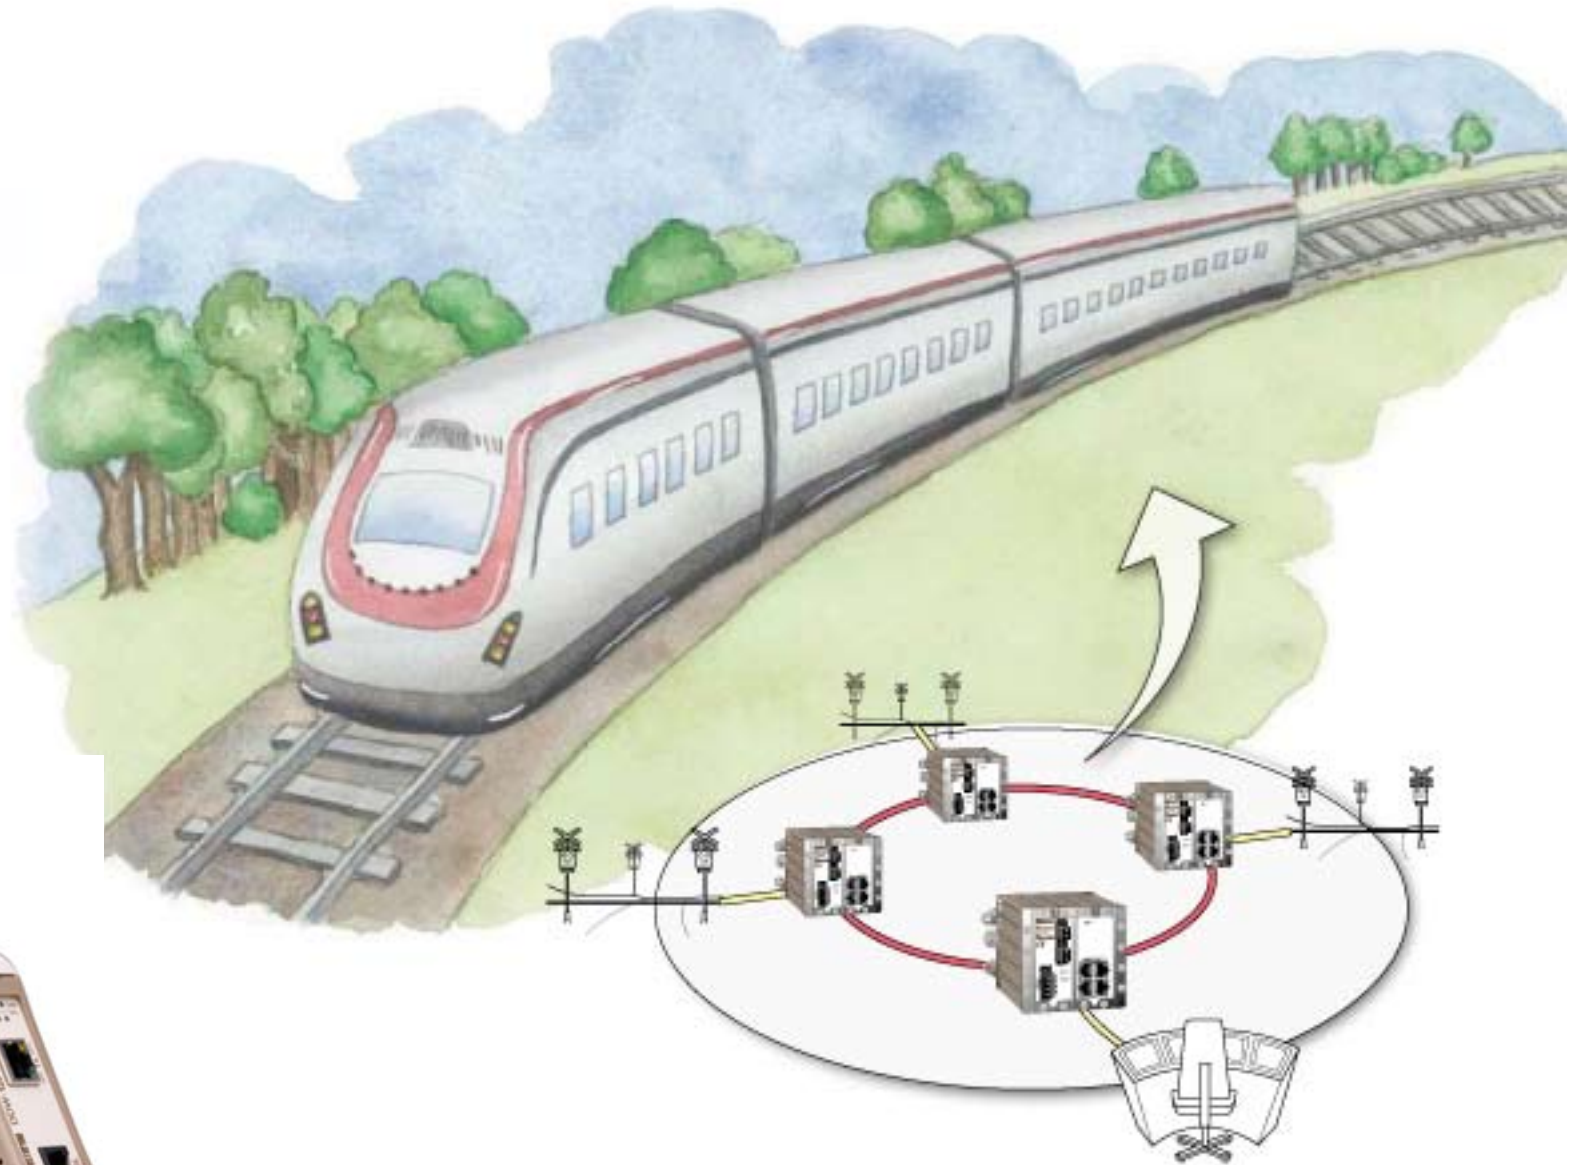

*Westermo have many years experience in both data communication technologies and railway applications and has therefore developed products and techniques that meet the many specific needs of the rail industry. Our Wolverine range meets the critical standard for trackside systems, EN-50121-4 Electromagnetic compatibility.*









# Extend your network far beyond the normal limits of Ethernet



The Wolverine series is the ideal solution for extending your Ethernet network over copper cables where in the past the only option would have been fibre. At shorter ranges the data rate can be as high as 5.7 Mbit/s in both directions. The technology used suggests transmission distances of up to 10 km (6.2 miles) at lower data rates. In practical applications however much greater distances have been achieved.

The SHDSL transmission technology makes the Wolverine series perfect for the reuse of existing copper cable installations from older communications networks. It is transparent for multicast addressing, VLAN packets, allows VPN pass-through for IPSec and can be used with protocols like MODBUS/TCP and Profinet I/O. The units will auto negotiate the transmission speed but can also be forced to choose a slower (more reliable) or faster (less reliable) data rate.

- ⌘ **G.SHDSL up to 5.7 Mbit/s.**  
*Distances up to 15 km with extensive line protection.*
- ⌘ **Built in 10/100BaseT 4 port switch**
- ⌘ **Serial to IP conversion (RS-232)**
- ⌘ **<20 ms FRNT ring redundancy on large networks**
- ⌘ **Transparent for multicast addressing, VLAN and VPN**
- ⌘ **Made easy configuration and comprehensive diagnostic**
- ⌘ **Approved for explosive environments (ATEX, Class 1, Div 2)**
- ⌘ **Extended temperature range (-40 to +70°C)**
- ⌘ **16 to 60 VDC redundant power input with reversed polarity protection**
- ⌘ **IP 40 robust metal housing**

Product/Art. no	Description	Connectivity
<b>DDW-100</b> 3621-0002 	Plug and play industrial Ethernet extender.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100BaseT DSL connector SHDSL connector
<b>DDW-120</b> 3621-0100 	Plug and play industrial Ethernet extender. Data rates up to 5.7 Mbit/s. Compatible with DDW-2xx.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100BaseT DSL connector SHDSL connector
<b>DDW-220</b> 3642-0200  	Plug and play industrial Ethernet extender. Data rates up to 5.7 Mbit/s. Built in switch.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	4 x 10/100BaseT 2 x DSL connectors
<b>DDW-221</b> 3642-0210  	Plug and play industrial Ethernet extender. Data rates up to 5.7 Mbit/s. Built in switch and support for redundant rings.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	4 x 10/100BaseT 2 x DSL connectors
<b>DDW-222</b> 3642-0220  	Plug and play industrial Ethernet extender. Data rates up to 5.7 Mbit/s. Built in switch and support for redundant rings. Serial interface with serial to IP conversion.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	4 x 10/100BaseT 2 x DSL connectors Serial (RS-232)

## Customer Success Story

# Safety critical railway control system




Poland's rail system is one of the largest in Europe, but in terms of quality and safety, there is a need for modernization. One of the companies employed for this is Zakłady KOMBUD Automation, a Polish company that offers overall solutions for railway automation, covering system design, production, implementation and maintenance.

A new safety system covering 100 km of railway line in central Poland has been built in two steps. A chain of 15 DDW-220 SHDSL Ethernet extenders connecting to a number of cabinets with traffic control equipment were installed in the first step. In the next step 15 DDW-221s were added alongside the tracks of the Centralna Magistrala Kolejowa (Central Rail Bus line).

The safety system update on this route has resulted in increased safety on many levels, and by making use of pre-existing cabling, they have been able to keep the cost down. In contrast to previously used devices, the Wolverine series has several advantages – The wide variation of operating temperature (-40 to +70°C) as well as the Transient Blocking Unit on each line interface that provides both over-current and over-voltage protection thus allowing the line to handle indirect lightning strike transients are just some of them.

The railway control system is divided in sections covering about 2 km (1.24 mi) each. At the end of every section there is a control station that monitors the traffic and prevents conflicting movements. This makes ongoing movement of traffic impossible unless the route is proved to be safe. Signalling systems provide information of nearby trains and suggest a safe speed. Axle counters provide accurate information as to whether another train is in the same section. A start and reset detection point is installed in every section, and if the count is evaluated as zero the section is presumed to be clear for a second train. The decision to use pre-existing cabling to provide the data communication in this safety critical application worried the customer at first. Parts of the cables were in bad shape and some of them were up to 30 years old.

Westermo distributor, Tekniska Polska, performed on-site tests using DDW-220s which were connected to the actual cables and achieved perfect communication. Today this application uses more than 30 Wolverine Ethernet extenders installed over sections 2 to 4 km in distance.

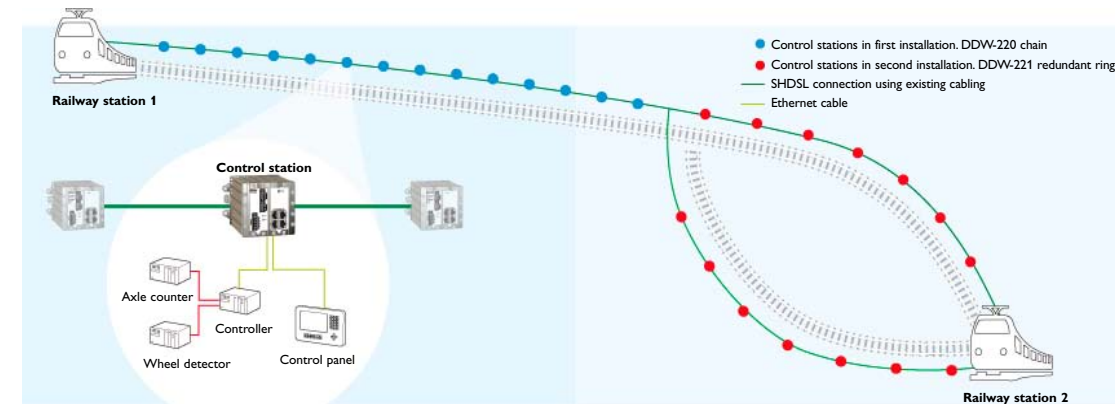

**First installation – completed May 2008:** A chain of 15 DDW-220 link the control stations with SHDSL technology. Existing cabling was used. Distance between control stations 2 to 4 km. **Second installation – completed December 2008:** A series of DDW-221 in a redundant ring configuration were added to the system to further enhance the robustness of the network.

# Remote Access

The ability to create remote connections to equipment can provide companies great savings both in time and money. Not only this, but improved customer service can also be offered. It is possible to control, monitor, update software or fault find, irrespective of where the equipment is located, by means of a simple remote connection.

Being able to connect to a remote server whilst working from home or using a laptop PC when travelling makes for much more efficient and flexible working conditions for many support engineers.



Pumping stations and waste water facilities are often situated on the outskirts of the community, remotely located from the control centre. Facilities like these need reliable communications for control and monitoring. Westermo provides a wide range of remote access solutions designed to operate in harsh environmental conditions. Our remote access products meet up to many specific requirements of the water and waste water industry.



## Industrial 3G HSUPA Routers

The MRD-310 and MRD-330 are two robust HSUPA routers designed to provide remote connectivity across mobile networks. The unit features an on-board two port switch, up to three serial ports, and the possibility to four digital I/O providing the unit with versatile connection options.

The MRD-series supports a wide variety of wireless standards, thus providing connectivity in a vary of applications. Secure connectivity can be achieved using a VPN which creates secure tunnels over insecure networks.

- ⌘ *Dual-Band UMTS / HSDPA / HSUPA Router*
- ⌘ *Quad-Band GSM / GPRS / EDGE*
- ⌘ *Downlink rates up to 7.2 Mbit/s, Uplink rates up to 2 Mbit/s*
- ⌘ *10/100BaseT Ethernet switch with DHCP server*
- ⌘ *Serial to IP conversion (RS-232) and digital I/O*
- ⌘ *Stateful packet inspection Firewall*
- ⌘ *VPN with IPSec, SSL, PPTP or L2TP encryption*
- ⌘ *Made easy configuration and comprehensive diagnostic*
- ⌘ *Extended temperature range (-20°C to +60°C)*
- ⌘ *10 to 60 VDC power input*





Product/Art. no	Description	Connectivity
<b>MRD-310</b> 3623-0001	Industrial 3G router, built in Ethernet switch and RS-232 serial interface. 	RS-232 2 x 10/100BaseT SIM
<b>MRD-330</b> 3623-0101	Industrial 3G router, built in Ethernet switch, three RS-232 serial ports and digital I/O. 	3 x RS-232 2 x 10/100BaseT 2 x Digital in 2 x Digital out SIM

## HSDPA/3G/GPRS Routers

The MR-series has features such as firewall, data encryption and VPN tunnelling to provide secure data transmission between sites. The device has a serial RS-232 port and one 10/100BaseT port. The MR-series supports routing protocols such as BGP, VRRP, OSPF, and RIP2. The MR-250 supports fast wireless connections using HSDPA with fallback to the best alternative available 3G UMTS/EDGE/GPRS.

- ⌘ *HSDPA / 3G UMTS / EDGE / GPRS Router*
- ⌘ *10/100 BaseT Ethernet switch*
- ⌘ *Integrated RS-232 terminal server port*
- ⌘ *SNMP management protocol*
- ⌘ *VRRP, OSPF, BGP, RIP2 redundant protocols*
- ⌘ *Firewall, IPSec VPN, DES, AES, SSL, SSH*
- ⌘ *Made easy configuration and comprehensive diagnostic*
- ⌘ *Extended temperature range (-20°C to +55°C)*
- ⌘ *12 to 24 VDC power input*

Product/Art. no	Description	Connectivity
<b>MR-200</b> 3622-0101	GPRS wireless Router. 	RS-232 10/100BaseT 2 x SIM 2 x USB
<b>MR-250</b> 3622-0110	3G/HSDPA wireless Router. 	RS-232 10/100BaseT 2 x SIM 2 x USB

Remote Access

## ADSL 2/2+ Router

ADSL offers high speed access to remote sites over an existing analogue telephone lines. The DR-250 has features such as firewall, data encryption and VPN tunnelling to provide secure data transmission between sites.

The device has a serial RS-232 port and four 10/100BaseT ports. The DR-250 supports routing protocols such as: BGP, VRRP, OSPF, and RIP2.



- ⌘ *ADSL / ADSL2 / ADSL2+ Compatibility*
- ⌘ *VRRP+, BGP, OSPF, RIP2, GRE, L2TP routing protocols*
- ⌘ *10/100 BaseT Ethernet switch*
- ⌘ *Integrated RS-232 terminal server port*
- ⌘ *SNMP management protocol*
- ⌘ *Firewall, IPSec VPN, DES, AES, SSL, SSH*
- ⌘ *Made easy configuration and comprehensive diagnostic*
- ⌘ *Extended temperature range (-20°C to +55°C)*
- ⌘ *10 to 28 VDC power input*

Product/Art. no	Description	Connectivity
<b>DR-250</b> 3622-xxxx	ADSL 2/2+ Router. 	RS-232 4 x 10/100BaseT 2 x SIM 2 x USB

## Serial and PSTN Routers

The ED-2xx series consists of two industrially rated Ethernet routers with different function levels. The ED-200 has a serial interface with both RS-232 and RS-422 connectivity. The ED-210 has a inbuilt PSTN modem and Leased Line interface and can be used as a dial in or dial out router or for point-to-point connection over a Leased Line.

- ⌘ *Router with built in 10/100BaseT Ethernet switch*
- ⌘ *RS-232 or RS-422 serial interface*
- ⌘ *Integrated V.34 telephone modem*
- ⌘ *Firewall and SNMP management protocol*
- ⌘ *Made easy configuration and comprehensive diagnostic*
- ⌘ *Extended temperature range (-25°C to +70°C)*
- ⌘ *10 to 60 VDC power input*
- ⌘ *Galvanic isolation and transient protection*

Product/Art. no	Description	Connectivity
<b>ED-200</b> 3609-5010	Router with RS-232 and RS-422 serial interface. 	4 x 10/100BaseT RS-232 RS-422
<b>ED-210</b> 3609-5001	Router with an inbuilt V.34 modem and Leased Line interface. 	4 x 10/100BaseT Leased Line PSTN

Remote Access

## Remote Connection via Telephone Lines

This product group consists of modems that can be connected to the public telephone network. The modems are approved in most European countries and in many countries in other parts of the world.

Westermo modems are designed for industrial applications, which means that there are functions built in to them that are especially useful in industrial systems like for instance PLC connection mode and DIP switch settings. The Westermo products have a watchdog function and are galvanically isolated to give reliable communication in harsh environments. Some of the modems can also be used on 2- or 4-wire leased lines over very long distances.

- ⌘ *Serial interface (RS-232, RS-422/485) up to 115 kbit/s*
- ⌘ *2- and 4-wire Leased Line*
- ⌘ *11 bit data format*
- ⌘ *High security functions (Watchdog / Password dial-back)*
- ⌘ *Made easy configuration using DIP-switches and TD-tool*
- ⌘ *Screw terminal or 9-pin D-sub for fast and flexible connections*
- ⌘ *Extended temperature range (-20°C to +70°C)*
- ⌘ *Wide power input*
- ⌘ *Galvanic isolation between all interfaces*





Product/Art. no	Description	Connectivity
<b>TDW-33</b> 3619-0001  	V.90 telephone modem with a RS-232 serial connector. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	PSTN Serial (RS-232)
<b>TD-36</b> 3618-xxxx  	V.34 telephone and leased line modem with RS-232 serial interface. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	PSTN Leased Line Serial (RS-232)
<b>TD-36 485</b> 3614-0500  	V.34 telephone and leased line modem with RS-232 and RS-422/485 serial interface. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	PSTN Leased Line Serial (RS-232) Serial (RS-422/485)
<b>TR-36B</b> 3614-0510 	Rack mounted V.34 telephone and leased line modem. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Connects to rack RV-07B
<b>RV-07B</b> 3130-3010 	19" rack for TR-36B telephone and Leased Line modem. RV-07B can hold up to 16 modems and two power supplies. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	PSTN Leased Line Serial (RS-232) Serial (RS-422/RS-485) Fault relay

Remote Access

## GSM / GPRS Modems

The GSM modems provide possibilities to control or monitor equipment with a serial interface from a remote location. The DTR signal could be used to trigger an SMS message or a dial-up connection to a pre-programmed number. The GDW-11 485 has RS-232, RS-422/485 serial interfaces.

- ⌘ *GSM 900/1800 modem*
- ⌘ *GPRS, class B, class 10*
- ⌘ *Serial interface (RS-232, RS-422/485) up to 115 kbit/s*
- ⌘ *DTR triggered -dialling and SMS up to 11 data bits*
- ⌘ *Speed CSD up to 14.4 kbit/s, GPRS up to 85.6 kbit/s*
- ⌘ *Extended temperature range (-25°C to +50°C)*
- ⌘ *10 to 60 VDC galvanic isolated power input*

Product/Art. no	Description	Connectivity
<b>GDW-11</b> 3615-0001  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	GSM/GPRS modem for 800 and 1800 MHz GSM networks.	Serial (RS-232 D-sub) Serial (RS-232 screw terminal) SIM
<b>GDW-11 485</b> 3615-0030  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	GSM/GPRS modem for 800 and 1800 MHz GSM networks. Dual serial support.	Serial (RS-232 D-sub) Serial (RS-422/485) SIM
<b>GD-01 US</b>  	GSM/GPRS modem for 850 and 1900 MHz GSM networks. Dual serial support. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Serial (RS-232 D-sub) SIM


**Note!** The whip aerial EX07 is included in 3615-0001, 3615-0030 and 3196-0020.

## ISDN-Adapter

The advantage with ISDN is the data rate as well as the fast connection time, less than 1 second compared with 15 to 25 seconds with an analogue modem.

The IDW-90 also supports the V.90 protocol, which eliminates the need for separate modems for analogue and digital data transfers. This makes it ideal for system suppliers that have installations of both types.

- ⌘ *Serial interface (RS-232, RS-422/485) up to 230 kbit/s*
- ⌘ *ISDN data rate up to 128 kbit/s*
- ⌘ *Analogue data rate up to 33.6 kbit/s (V.34)*
- ⌘ *High security functions (Watchdog / Password dial-back)*
- ⌘ *Generic I/O inputs and Relay output*
- ⌘ *DTR/TX and I/O event triggered dialling*
- ⌘ *Event triggered SMS-message transmission*
- ⌘ *10 to 60 VDC power input*

Product/Art. no	Description	Connectivity
<b>IDW-90</b> 3620-0001  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	ISDN Terminal adapter with serial support (RS-232 and RS-422/485).	ISDN Serial (RS-232) Serial (RS-422/485) Digital I/O




Remote Access

## Leased Line

Westermo has multidrop modems both for private and for leased lines. Both type of modems can be connected to serial devices with RS-232 or RS-422/485 interfaces.

The V.23 standard which is the only multidrop leased line standard allows speed up to 1200 bit/s on two or four wire. Multidrop applications on private lines can have speeds up to 19 200 bit/s but the distances depend on the line quality and the number of drop points on the line.



- ⌘ *Serial interface (RS-232, RS-422/485)*
- ⌘ *2- and 4-wire Leased Line*
- ⌘ *Transmission distance up to 25 km*
- ⌘ *Point-to-point and multidrop applications*
- ⌘ *Extended temperature range (-25°C to +70°C)*
- ⌘ *Wide power input (AC/DC)*
- ⌘ *Galvanic isolation between all interfaces*

Product/Art. no	Description	Connectivity
<b>TD-23</b> 3193-xxxx 	2- or 4-wire leased line V.23 modem for point-to-point or multidrop applications. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Leased line Serial RS-422/485 Serial RS-232
<b>TD-29</b> 3193-xxxx 	2- or 4-wire leased line V.23 modem for point-to-point or multidrop applications. Transmission rates up to 19 200 bit/s <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Leased line Serial RS-422/485 Serial RS-232
<b>TD-29P</b> 3193-xxxx 	2-wire leased line modem for PROFIBUS DP connections. Multidrop, repeater and point-to-point applications. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Leased line Serial RS-485

## Wireless Solutions

The RM series provides reliable and secure high-speed wireless Ethernet connectivity across a broad range of applications in process and automation plants. It is very well suited for connection to PLC's, HMI, DCS, data acquisition, video devices and industrial PC's. The units has an Ethernet port (10/100BaseT) as well as two serial ports (RS-232 and RS-485) and on-board I/O for local and remote link status, or external status transfer:

- ⌘ *Industrial frequency strengths*
- ⌘ *Serial interface (RS-232, RS-422/485) up to 115 kbit/s*
- ⌘ *10/100BaseT Ethernet connection*
- ⌘ *Bridge/router functions for Ethernet protocols*
- ⌘ *128-bit AES encryption*
- ⌘ *Firewall with MAC-address filtering*
- ⌘ *Made easy configuration and comprehensive diagnostic*
- ⌘ *Extended temperature range (-40°C to +60°C)*
- ⌘ *10 to 30 VDC power input*
- ⌘ *Galvanic isolation between all interfaces*

Product/Art. no	Description	Connectivity
<b>RM-80</b> 3193-xxxx 	Wireless Ethernet Radio Modem. 896 MHz. (Europe), 76 kbit/s. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100 BaseT Serial (RS-232) Serial (RS-485) Digital I/O
<b>RM-90</b> 3193-xxxx 	Wireless Ethernet Access Point and client. 900 MHz. (US), 200 kbit/s. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100BaseT Serial (RS-232) Serial (RS-485) Digital I/O
<b>RM-240</b> 3193-xxxx 	WLAN access point and client. 2.4 GHz, 802.11b, 11 Mbit/s. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	10/100BaseT Serial (RS-232) Serial (RS-485) Digital I/O

# Fibre Optics

*Fibre Optic cable has the advantages that it is completely insensitive to electrical and magnetic disturbances. It is therefore ideal to install as a communication media in harsh industrial environments. It also provides benefits such as high data rates over long distances. Depending on choice of transceiver and cable (multimode / singlemode) distances up to 80 km (49.7 mi) can be achieved.*









*Wind farms are often situated in remote and demanding locations where extreme variations in temperature, moisture and vibration can be an issue. Building a control and monitoring system in this environment can be difficult as wind farms may consist of several hundred turbines spread over large geographic areas. The Westermo ODW series can be used to build super fast redundant fibre ring solutions over long distances with a reconfiguration time less than 20 ms. This series of products have been developed for extreme operating conditions, which makes them a perfect choice for this kind of extreme application.*

# Industrial Fibre Optic Modems

Fibre optic modems are often used in data communication systems to bridge long distances at high data rates. Fibre optic systems are particularly immune to electromagnetic interference and therefore very suitable for harsh industrial environments. Westermo products can transmit data at up to 12 Mbit/s over distances up to 80 km depending on the fibre type.

The ODW-series can be used in point-to-point, multidrop and redundant ring installations between devices with serial interfaces.





- ⌘ *Serial interface (RS-232, RS-422/485) up to 1.5 Mbit/s*
- ⌘ *Flexible transceiver configuration (multi, single, bi-di) up to 80 km*
- ⌘ *Retiming (no limits regardless of network size)*
- ⌘ *Point-to-point, multidrop and redundant ring applications*
- ⌘ *Extended temperature range (-40 to +70°C)*
- ⌘ *10 to 60 VDC redundant power input*
- ⌘ *Galvanic isolation between all interfaces*

Product/Art. no	Description	Connectivity
<b>ODW-611</b> 3650-xxxx 	Point-to-point fibre optic modem for PROFIBUS-DP networks. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	SFP slot Profibus DP (RS-485) Status screw terminal
<b>ODW-612</b> 3650-xxxx 	Point-to-point fibre optic modem for PROFIBUS-DP networks with support for redundant rings. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	2 x SFP slots Profibus DP (RS-485) Status screw terminal
<b>ODW-621</b> 3650-xxxx 	Fibre optic modem with RS-232 serial interface. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	SFP slot Serial (RS-232) Status screw terminal
<b>ODW-622</b> 3650-xxxx 	Fibre optic modem with RS-232 serial interface and support for redundant rings. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	2 x SFP slots Serial (RS-232) Status screw terminal
<b>ODW-631</b> 3650-xxxx 	Fibre optic modem with RS-422/485 serial interface. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	SFP slot Serial (RS-422/485) Status screw terminal
<b>ODW-632</b> 3650-xxxx 	Fibre optic modem with RS-422/485 serial interface and support for redundant rings. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	2 x SFP slot Serial (RS-422/485) Status screw terminal

# Fibre Optic Solutions for LONWORKS® Networks


These units are used to extend the transmission range between two or more LONWORKS® networks on a single- or multimode fibre optic cable up to distances of 20 km (12.4 mi). It can either be a point-to-point, multidrop or a redundant ring solution. For point-to-point applications the PP-version is used. The modems have an alarm output to indicate if any failure occurs on the fibre optic link.

- ⌘ *LONWORKS®, 78 kbit/s TP/FT-10 up to 20 km*
- ⌘ *Flexible transceiver configuration (multi, single)*
- ⌘ *Point-to-point, multidrop and redundant ring applications*
- ⌘ *Transparent repeater functions*
- ⌘ *Optical signal regenerated*
- ⌘ *Alarm output indicating fibre failure*
- ⌘ *Extended temperature range (-40°C to +60°C)*
- ⌘ *10 to 60 VDC redundant power input*

Product/Art. no	Description	Connectivity
<b>LRW-102</b> 3650-xxxx 	Fibre optic converter/repeater for LONWORKS TP/FT-10 point-to-point applications. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	TP/FT-10 connector SFP slot Status screw terminal
<b>LRW-102 PP</b> 3650-xxxx 	Fibre optic converter/repeater for LONWORKS TP/FT-10 with support for redundant rings. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	TP/FT-10 connector 2 x SFP slot Status screw terminal
<b>LRW-112</b> 3650-xxxx 	Fibre optic router for LONWORKS TP/FT-10 point-to-point applications. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	TP/FT-10 connector SFP slot Status screw terminal
<b>LRW-122 PP</b> 3650-xxxx 	Fibre optic router for LONWORKS TP/FT-10 with support for redundant rings. <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	TP/FT-10 connector 2 x SFP slot Status screw terminal

# Serial Converters

Despite the dominance of Ethernet in modern industrial networks there is still a vast installed base of legacy serial equipment that is still in use. Whether it be RS-232, RS-422/485, PROFIBUS, M-bus or even 20 mA current loop. Westermo still offers a range of solutions.

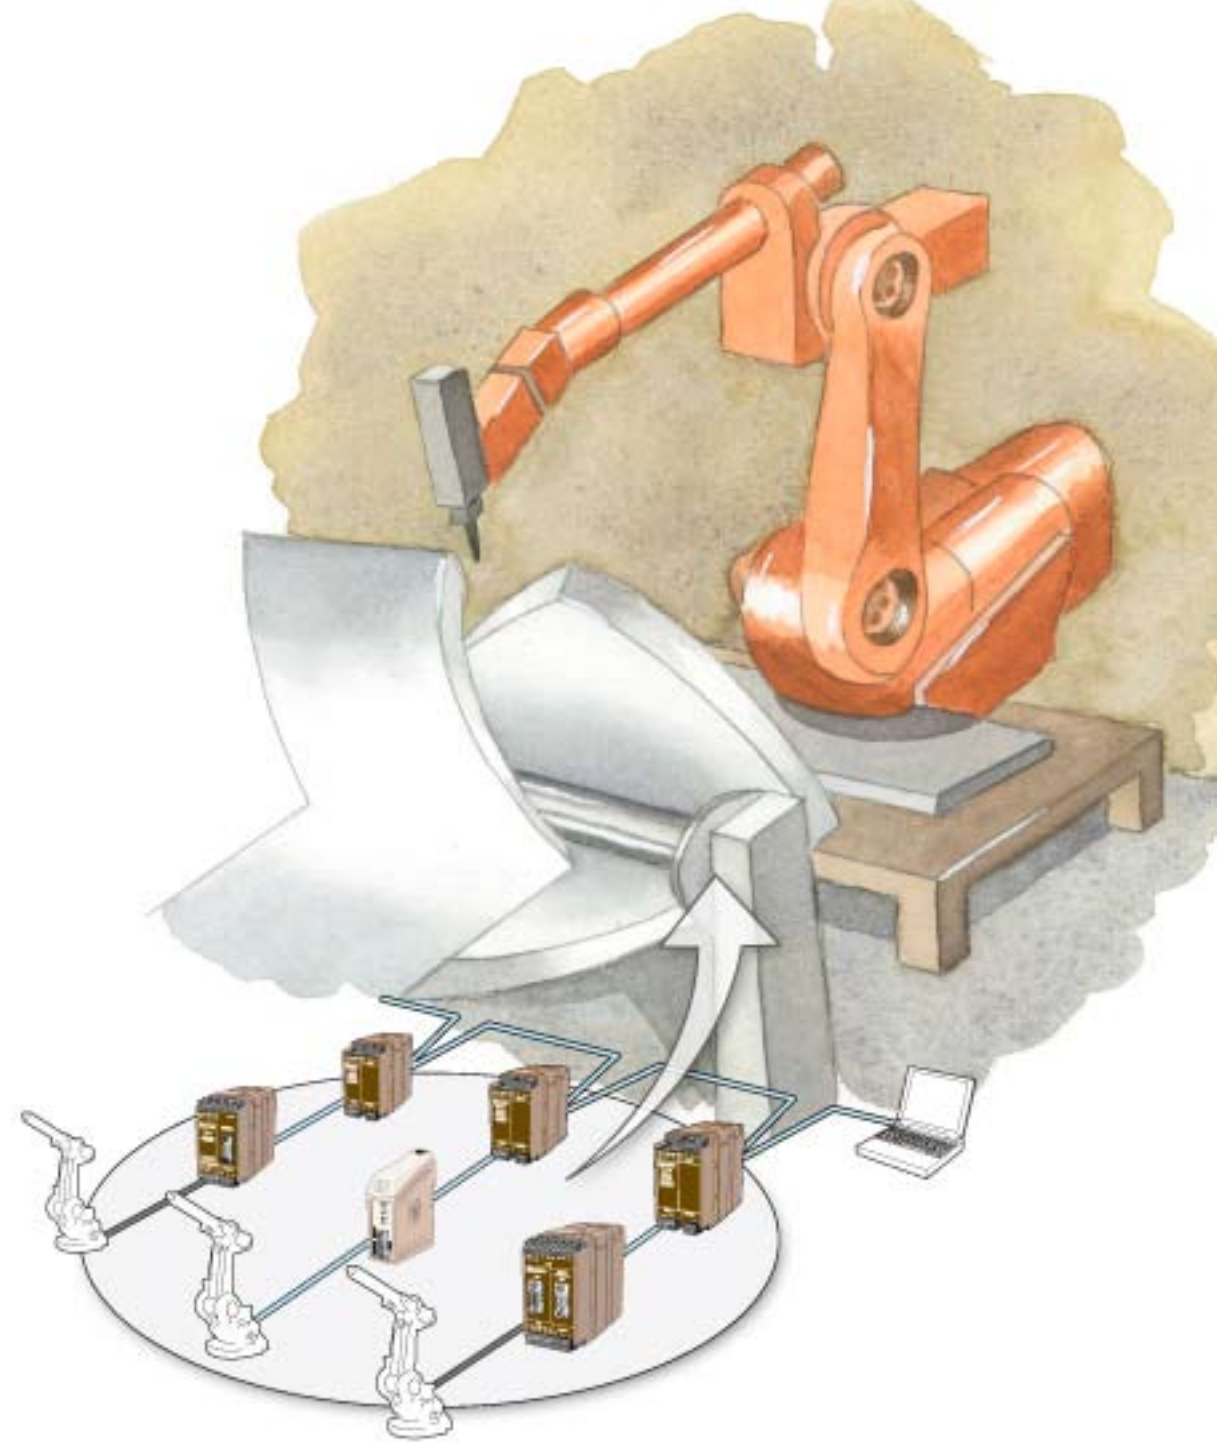


When linking legacy serial equipment to a central computer there are often distance limitations and the equipment might also be located in an environment with high electromagnetic interference. Sometimes equipment can have different sorts of serial interfaces. For all these problems Westermo have many tried and tested solutions. Our serial converters, repeaters and isolators will solve most of your needs when building serial networks.

## RS-232, Point-to-point

The MD-12 is used in point-to-point applications or as a start and end modem in a multidrop installation with products using VV1 technology. Westermo's  $\pm 10$  mA balanced current loop (W1) transmission technique makes it possible to transmit data up to 18 km (11.2 mi) at low data rates on a 4-wire cable. At shorter ranges transmission rates up to 38.4 kbit/s can be achieved.

- ⌘ *Serial interface (RS-232/V.24)*
- ⌘ *Transmission distance up to 18 km*
- ⌘ *Protocol transparent*
- ⌘ *Transfer status signals*
- ⌘ *Wide power input (AC/DC)*
- ⌘ *Galvanic isolation between all interfaces*



Product/Art. no	Description	Connectivity
<b>MD-12</b> 3150-xxxx 	Short haul modem for RS-232 and V.24 interfaces. Power supply option: 207-264 VAC, 103-132 VAC, 12-36 VDC, 36-55 VDC <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Serial RS-232 or V.24/v.28 +10mA Current Loop

## RS-232, Multidrop

Westermo's  $\pm 10$  mA balanced current loop (W1) transmission technique makes it possible to transmit data up to 18 km (11.2 mi) at low data rates on a 4-wire cable. At shorter ranges transmission rates up to 38.4 kbit/s can be achieved.

The LD-01 is also available in a "by-pass" version. This model ensures that if a modem in the multidrop network should fail that modem will be by-passed, hence not effecting the communications between other units on the network.

- ⌘ *Serial interface (RS-232/V.24 or RD-422/485)*
- ⌘ *Multidrop applications*
- ⌘ *Protocol transparent*
- ⌘ *Tolerant to high levels of interference*
- ⌘ *Wide power input (AC/DC)*
- ⌘ *Galvanic isolation between all interface*


Product/Art. no	Description	Connectivity
<b>LD-01</b> 3154-xxxx 	Line split unit for multidrop applications. Power supply option: 207-264 VAC, 103-132 VAC, 12-36 VDC, 36-55 VDC <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Serial RS-232 10 mA Current Loop
<b>LD-02</b> 3156-xxxx 	Line split unit for multidrop applications. Power supply option: 207-264 VAC, 103-132 VAC, 12-36 VDC, 36-55 VDC <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Serial RS-232 Serial RS-422/485 10 mA Current Loop

## RS-232, Repeater/Isolator

This unit are used to extend distances or to provide galvanic isolation between different equipment in installations where ground potentials may cause problems.

The MD-52 is used together with RS-232 equipment and the RD-48 with RS-422/485.

- ⌘ *Serial interface (RS-232/V.24)*
- ⌘ *Screw terminal or 9-pin D-sub for fast and flexible connections*
- ⌘ *Protocol transparent*
- ⌘ *Tolerant to high levels of interference*
- ⌘ *Extended temperature range (DC: -25°C to +70°C)*
- ⌘ *Wide power input (AC/DC)*
- ⌘ *Galvanic isolation between all interfaces*

Product/Art. no	Description	Connectivity
<b>MD-52</b> 3601-xxxx 	V.24 Isolator to provide galvanic isolation between serial and V.24 interfaces. Power supply option: 207-264 VAC, 103-132 VAC, 12-36 VDC, 36-55 VDC <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	2 x Serial RS-232/V.24/V.28


## RS-422/485, Repeater/Isolator

According to the standard the RS-422/485 interface is able to support a total of 32 connected devices and a transmission range of up to 1200 meters (4000 ft).

A repeater can be used to extend the range by an extra 1200 metres or to add another 32 connected devices. Up to 8 repeaters can be used in a single network.

The RD-48 can also allow star networks to be created, provide galvanic isolation between segments and correct termination of the line.

- ⌘ *Repeater with retiming for high data rates*
- ⌘ *2-/4-wire conversion*
- ⌘ *Full termination and failsafe switch selectable*
- ⌘ *Profibus DP compatible*
- ⌘ *Tolerant to high levels of interference*
- ⌘ *Extended temperature range (Temp version -40°C to +70°C)*
- ⌘ *Wide power input (AC/DC)*
- ⌘ *Galvanic isolation between all interfaces*


Product/Art. no	Description	Connectivity
<b>RD-48</b> 3153-xxxx 	RS-422/485 Serial Repeater. Power supply option: 85.5-264 VAC, 9.6-57.6 VDC <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	2 x Serial RS-422/485

## Fieldbus Adapter

**Serial link between PROFIBUS DP networks.** The FD-10 are used to establish a serial link and transfer I/O data between two or more PROFIBUS DP networks. It could be on an existing Ethernet network, dial-up, fibre optic link or even a wireless connection via radio or GSM.

The FD-10 is used when there is a master in each PROFIBUS DP network.


- ⌘ Serial interface (RS-232 / RS-485)
- ⌘ Permits connection of a Profibus DP-network
- ⌘ Full termination and failsafe switch
- ⌘ Integrated PROFIBUS DP-slave
- ⌘ Compatible with PROFIBUS DP-standard I/O-Data
- ⌘ Tolerant to high levels of interference
- ⌘ Extended temperature range (Temp version -25°C to +70°C)
- ⌘ 10 to 60 VDC power input
- ⌘ Galvanic isolation between all interfaces

Product/Art. no	Description	Connectivity
<b>FD-10</b> 3630-xxxx	Industrial DP Fieldbus Adapter  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Profibus DP Serial RS-485 Serial RS-232

## 20 mA Current Loop Serial Converter

MD-21 is a converter between serial RS-232 and 20 mA current loop.


- ⌘ 20 mA to RS-232/V.24 serial conversion
- ⌘ Protocol transparent
- ⌘ Termination and fail-safe
- ⌘ Active or passive transmitter and receiver
- ⌘ Tolerant to high levels of interference
- ⌘ Wide power input (AC/DC)
- ⌘ Galvanic isolation between all interfaces

Product/Art. no	Description	Connectivity
<b>MD-21</b> 3151-xxxx	Current loop converter: Conversion between 20mA and RS-232/V.24. Power supply option: 207-264 VAC, 103-132 VAC, 12-36 VDC, 36-55 VDC  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	20mA current loop Serial (RS-232 D-sub) Serial (RS-232 Screw terminal)

## M-Bus Converter

**Solutions for M-Bus applications.** The AD-01 has several functions, which make it easy to build a complete network. The adapter can be used as a converter from RS-232 to M-Bus, a repeater to make the communication distance longer or to extend the distance between two M-bus networks using any kind of serial RS-232 communications equipment.

- ⌘ RS-232/V.24 and M-Bus master and slave interface
- ⌘ Data rate from 300 bit/s up to 9 600 bit/s
- ⌘ Autobaud functionality
- ⌘ Up to 120 M-bus slaves
- ⌘ Tolerant to high levels of interference
- ⌘ 207-253 VAC power input
- ⌘ Galvanic isolation between all interfaces

Product/Art. no	Description	Connectivity
<b>AD-01</b> 3612-0001	M-Bus adapter:  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Serial RS-232/V.24 (Master) Serial RS-232/V.24 (Slave) M-bus

Serial Converters


## Fieldbus Converter

**Connect serial device to a PROFIBUS DP network.** The FD-40 Fieldbus converter allows devices with serial RS-232 or RS-485 interfaces to be integrated into PROFIBUS DP networks. The FD-40 works as a PROFIBUS DP slave module enabling serial data to be transmitted as normal DP process data.

The FD-10 are used to establish a serial link and transfer I/O data between two or more PROFIBUS DP networks. It could be on an existing Ethernet network, dial-up, fibre optic link or even a wireless connection via radio or GSM.

The FD-10 is used when there is a master in each PROFIBUS DP network.

- ⌘ Serial interface (RS-232 / RS-485)
- ⌘ Fully compatible with the PROFIBUS DP-standard
- ⌘ Up to 12 Mbit/s
- ⌘ Integrated PROFIBUS DP-slave
- ⌘ Full termination and failsafe switch
- ⌘ Tolerant to high levels of interference
- ⌘ Extended temperature range (Temp version -25°C to +70°C)
- ⌘ 10 to 60 VDC power input
- ⌘ Galvanic isolation between all interfaces



Product/Art. no	Description	Connectivity
<b>FD-40</b> 3630-1400	Fieldbus converter: Serial (RS-232/RS-485) to PROFIBUS DP.  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Profibus DP Serial RS-485 Serial RS-232

## RS-422/485 Serial Converters

The MDW-45 is a serial RS-232 to RS-422/485 interface converter.

The unit can be used in point-to-point and multidrop applications on 2- or 4-wires with data rates up to 100 kbit/s and cable lengths up to 1200 metres (4000 ft).





- ⌘ RS-232 to RS-422/485 serial conversion
- ⌘ Point-to-point and multidrop applications
- ⌘ 2- and 4-wire Leased Line
- ⌘ Tolerant to high levels of interference
- ⌘ Extended temperature range (MDW-45 -40°C to +70°C)
- ⌘ Wide power input
- ⌘ Galvanic isolation between all interfaces

Product/Art. no	Description	Connectivity
<b>MDW-45</b> 3617-xxxx	RS-232 to RS-422/422 serial converter: Power supply option: 9.6-57.6 VDC 85.5-264 VAC/88-300 VDC  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Serial (RS-232) Serial (RS-422/485)
<b>MD-45</b> 3157-xxxx	RS-232 to RS-422/422 serial converter: Power supply option: 88-300 VDC/85.5-264 VAC, 9.6-57.6 VDC/10-45 VAC  <a href="#">DATA SHEET</a> <a href="#">USER GUIDE</a> <a href="#">WEB PAGE</a>	Serial (RS-232) Serial (RS-422/485)

Serial Converters

# Housings

Westermo products come in a series of different enclosures specially designed for harsh and demanding environments. All housings fulfil high grade quality requirements and allow the device to work in an extended temperature range. IP ranges span from IP-40 for the plastic housing up to IP-65 for the most rugged metal housing.

Housings	Description	Products
	<b>Plastic house, DIN-mounted</b> Dimension W x H x D 55 x 100 x 132 mm	ED-200, ED-210, DDW-100, DDW-120, TD-36, TD-36 485, GD-01 US, TD-23, TD-29, TD-29P, MD-21, FD-10, FD-40, MD-12, LD-01, LD-02, MD-52, RD-48, AD-01.
	<b>Plastic house, DIN-mounted</b> Dimension W x H x D 35 x 121 x 119 mm	SDW-5xx-series, ODW-6xx-series, LRW-1xx-series, TDW-33, GDV-11, GDW-11 485, IDW-90, EDW-100, EDW-120, MCW-211, MDW-45.
	<b>Metal housing, 2-slot, DIN-rail or wall mounted</b> Dimension W x H x D 134 x 105 x 122 mm	RFI-10, DDW-220, DDW-221, DDW-222.
	<b>Metal housing, 3-slot, DIN-rail or wall mounted</b> Dimension W x H x D 175 x 105 x 122 mm	RFI-18, RFI-14-F4G, RFI-18-F4G-T4G.
	<b>Metal housing, DIN-rail or table top</b> Dimension W x H x D, 160 x 29 x 128 mm Dimension W x H x D, 239 x 29 x 154 mm	MR-200, MR-250. DR-250.
	<b>Metal housing, DIN-rail or table top</b> Dimension W x H x D 113 x 33 x 154 mm Dimension W x H x D 113 x 55 x 154 mm	MRD-310. MRD-330.
	<b>Plastic house, DIN-mounted</b> Dimension W x H x D 35 x 150 x 135 mm Dimension W x H x D 30 x 140 x 114 mm	RM-80, RM-90. RM-240.
	<b>Metal housing, DIN-rail</b> Dimension W x H x D 52.5 x 100 x 101 mm	Lynx-series.
	<b>Metal housing, DIN-rail or wall mounted</b> Dimension W x H x D 175 x 100 x 50 mm	Viper-series.
	<b>19" Rack metal housing</b> Dimension W x H x D 485 x 135 x 180 mm	RV-07B.





# Accessories



Westermo have a range of accessories to match our products. antennas, transceivers, power supplies and more. Contact Westermo back office for more information.



## Transceivers

Westermo offer a wide selection of Small Form Pluggable (SFP) transceivers. The selection of transceivers are available in a variety of models and lengths offering transmission ranges from 2 km to 80 km over fibre. The CX transceiver allows SFP ports to be used to connect an Ethernet RJ-45 cable. Contact Westermo for detailed information.

Product/Art. no	Description
<b>Single Mode Transceivers</b> 	Single Mode Transceivers are available in a variety of models. Transmission capacity from 100 Mbit to 10 Gbit and distances from 15 to 120 km.
<b>Multi Mode Transceivers</b> 	Multi Mode Transceivers are available in a variety of models. Transmission capacity from 100 Mbit to 1 Gbit and distances from 550 m to 60 km.
<b>Bi-directional Transceivers</b> 	Bi-Di Transceivers are available in a variety of models. 100 Mbit transmission capacity and distances from 2 km to 60 km.
<b>CX Transceiver</b> 	CX transceivers links a SFP port to a copper-based network using a standard RJ-45 connection. 1 Gbit transmission capacity and 100 m distance.




## Power Supply / Adapters

Westermo provides a set of industrially approved power supplies complying with many mayor safety approvals. The most common power supply, PS-30, comes in a DIN-mounted housing and can operate in a extended temperature range.

Product/Art. no	Description
<b>PS-20</b> 	Power supply for RV-07B Rated voltage 100 to 240 VAC Operating voltage 90 to 254 VAC
<b>PS-30</b> 	Power supply, DIN mounted Output: DC 24 – 28V / 30 W PSU Input: 85 to 264VAC, 85 to 375 VDC

## Cables

Special cables for reading diagnostics, antennas, radio, fibre and Ethernet are available in a variety of lengths and jacketing options. Please contact Westermo for further information.

Product/Art. no	Description
<b>Diagnostic cable</b> 	Cable for diagnostic DDW-100 DDW-100 to RS-232
<b>Diagnostic cable</b> 	Cable for diagnostic DDW-120 and RedFox Console port to USB
<b>M12 cables</b> 	M12 – M12. In length, 1 m, 5 m and 15 m
<b>M12-RJ45 cables</b> 	M12 – RJ-45 In length, 1 m, 5 m and 15 m
<b>Power cables</b> 	M12 In length, 1 m and 5 m
<b>GSM cables</b> <b>TZC</b> <b>SMA/F-SMA/M</b> 	Cables for antennas. In length, 3 m, 5 m and 10 m
<b>Radio cables</b> <b>RG213</b> 	Cables for antennas. In length, 3 m, 5 m, 7 m, 10 m and 15 m

# Antennas / Adapters

Special antennas for radio and GSM are available in a variety of models. Please contact Westermo for further information.

Product/Art. no	Description
CA-930D CA-860D	DIPOLE, 4 dBi 890 –960 MHz
CA-930Y series CA-860Y series	YAGI, 6 dBi, 8 dBi and 10 dBi, 890 –960 MHz YAGI, 6 dBi, 8 dBi and 10 dBi, 830 –890 MHz
EX07	Whip antenna with magnetic foot, 900/1800 MHz
GS-23/M70EXR	Low profile antenna
CA-860Q	Whip antenna with SMA connector, 830 –890 MHz
CA-2400M	Corner reflector antenna 2.4 GHz, N-connector

# Technology designed to take a beating

We regularly test our products to ensure quality at all times and safety is always an important consideration in our product design and production. Westermo products are certified and approved by some of the most trusted sources across the globe for product compliance. This is a small selection of approvals and standards that we work with:

**ATEX** The ATEX directive describes what equipment is allowed in an environment with a potentially explosive atmosphere. Even though the EU originally developed the directive, it is now being applied all over the world.  
*Westermo products approved to the ATEX directive: DDW-220, DDW-221, DDW-222*

**Class 1, Division 2** is the equivalent to the Ex classification we have in accordance with the ATEX directive, but for the US and Canadian market. Westermo have obtained the Class 1, Division 2 certification through an independent third party approval company FM Approvals.

*Westermo products with Class 1, Division 2 approval: LYNX-series, DDW-220, DDW-221, DDW-222.*

**DNV** The leading international provider of services for managing risks, Det Norske Veritas (DNV), has approved Westermo units for marine usage according to DNV Standard for Certification 2.4:2006 (covers the requirements in IACS UR E10:2006). The approval by the independent third party proves Westermo compliance according to national and international standards.  
*Westermo products with DNV approval: SDW-550, LYNX-series.*

**UL 60950-1** This safety standard is applicable to Information Technology Equipment and specifies requirements intended to reduce risks of fire, electric shock or injury for the operator and layman who may come into contact with the equipment and, where specifically stated, for a service person. This standard is intended to reduce such risks with respect to installed equipment, whether it consists of a system of interconnected units or independent units, subject to installing, operating and maintaining the equipment in the manner prescribed by the manufacturer.  
*Westermo products certified according to UL 60950-1: TD-36 232, TD-36 485, TDW-33, GD-01, SDW-550.*

**EN 50155** A number of Westermo units have been tested according to the European railway standard EN 50155 (Electronic Equipment Used On Rolling Stock). Performance standards are defined for a railway's operational environment, including shock, vibration, extended temperature range, humidity and many other factors. The standard has been defined so that electronics in rail cars will be able to operate continuously for approximately 250,000 hours.  
*Westermo products tested according to EN 50155: Viper-series.*

**EN 50121-4** outlines the principles for Electromagnetic compatibility (EMC) behaviour and management process for achieving EMC at the interface between railway infrastructures and trains. The objective of this standard is to specify the EMC emission and immunity requirements for railway products, and for the railway as an installation.  
*Westermo products tested according to EN 50121-4: LYNX-series, SDW-500 series, DDW-series, 200-series, Viper8, TD-36, TD-23, TD-29, MDW-45.*

**IEC 61850-3** is an international standard for electrical substation systems. The standard enables integration of all protection, control, measurement and monitoring functions within a substation. It combines the convenience of Ethernet with the performance and security, which is essential in substations today.  
*Substation IEC 61850-3: LYNX-series,*

In general almost all Westermo products complies with the immunity for industrial environments in accordance with **EN 61000-6-2** and emission for residential, commercial and light industrial environments in accordance with **EN 61000-6-3**.





## **H E A D   O F F I C E**

**Gross Automation**  
Westermo Sales  
Phone: 262.252.1600  
Fax: 262.252.1616  
[sales@grossautomation.com](mailto:sales@grossautomation.com)  
[www.westermosales.com](http://www.westermosales.com)